

## Hollow Worms and Worm Shafts Double-Thread, Right Hand


Double-threaded worms to be paired with double-threaded worm gears page 296. If the module (and number of threads) are match

various ratios at various axle distances can be realized (see table page 296).

## Hollow Worms, Whirled, Made from Steel, Double-Thread, Right Hand

Material: C45

Pressure angle 20°.

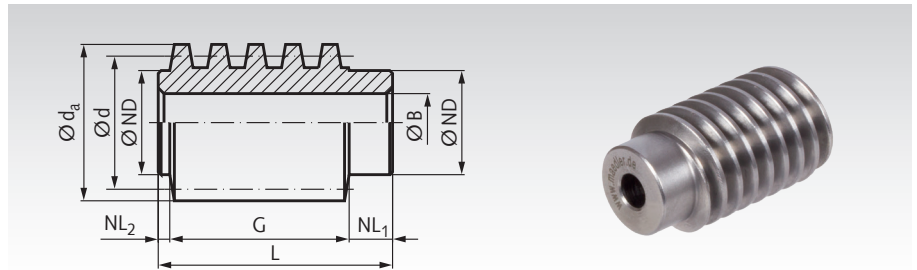


Ordering Details: e.g.: Product No. 310 200 00,  
Worm, Steel, Module 3, Double-Thread, Right Hand

	Product No.	d mm	$d_a$ mm	ND mm	$NL_1$ mm	G mm	$NL_2$ mm	L mm	B <sup>H7</sup> mm	Weight kg
<b>Module 3.0</b>	310 200 00	38	44	30	12	46	3	61	15	0,4
<b>Module 4.0</b>	310 500 00	50	58	40	15	62	4	81	20	1,2

## Worm Shafts, Whirled, with Centring Hole, Made from Steel, Double-Thread, Right Hand


Material: C45

Pressure angle 20°.

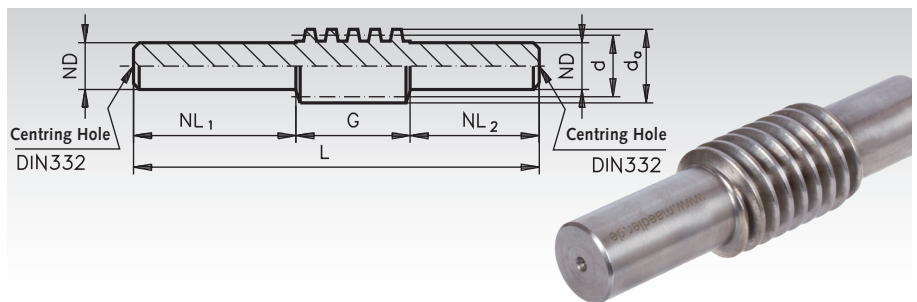

Ordering Details: e.g.: Product No. 310 201 00,  
Worm Shaft, Steel, Module 3, Double-Thread,  
Right Hand

	Product No.	d mm	$d_a$ mm	$ND^{+0,2}_{+0,4}$ mm	$NL_1$ mm	G mm	$NL_2$ mm	L mm	Weight kg
<b>Module 3.0</b>	310 201 00	38	44	30	130	46	90	266	1,6
<b>Module 4.0</b>	310 501 00	50	58	40	175	62	120	357	3,8



**Reworking within  
24h-service possible.  
Custom made parts  
on request.**