

Nuts DIN 508 for Tee Slots DIN 650

Material:


Tempered steel, tensile strength 10, black.
Tempered steel, tensile strength 10, zinc-plated.
Stainless steel 1.4571 (AISI 316).



T-slot nuts, according to DIN 508.

Suitable for T-slots DIN 650 / ISO 299.

More sizes at www.maedler.de.

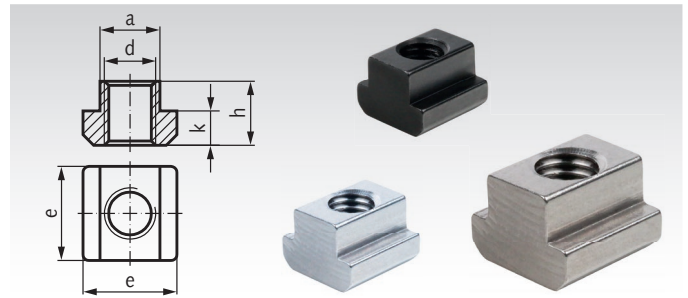

Ordering Details: e.g.: Product No. 655 104 05, Nut DIN 508, M4 x 5, black

| Product No. black | Product No. zinc-plated | Product No. Stainless steel | d mm | for Tee Slot mm | a mm | e mm | h mm | k mm | Weight g |
|----------------------|----------------------------|--------------------------------|---------|--------------------|---------|---------|---------|---------|-------------|
| 655 104 05 | - | - | M4 | 5 | 4,6 | 9 | 6,5 | 3 | 2 |
| 655 105 06 | 655 105 06VZ | 655 105 06A4 | M5 | 6 | 5,6 | 10 | 8 | 4 | 3 |
| 655 105 08 | 655 105 08VZ | - | M5 | 8 | 7,6 | 13 | 10 | 6 | 8 |
| 655 106 08 | 655 106 08VZ | 655 106 08A4 | M6 | 8 | 7,6 | 13 | 10 | 6 | 8 |
| 655 106 10 | 655 106 10VZ | - | M6 | 10 | 9,6 | 15 | 12 | 6 | 14 |
| 655 106 12 | 655 106 12VZ | - | M6 | 12 | 11,6 | 18 | 14 | 7 | 22 |
| 655 108 10 | 655 108 10VZ | 655 108 10A4 | M8 | 10 | 9,6 | 15 | 12 | 6 | 14 |
| 655 108 12 | 655 108 12VZ | - | M8 | 12 | 11,6 | 18 | 14 | 7 | 22 |
| 655 108 14 | 655 108 14VZ | - | M8 | 14 | 13,6 | 22 | 16 | 8 | 34 |
| 655 110 12 | 655 110 12VZ | 655 110 12A4 | M10 | 12 | 11,6 | 18 | 14 | 7 | 22 |
| 655 110 14 | 655 110 14VZ | - | M10 | 14 | 13,6 | 22 | 16 | 8 | 34 |
| 655 112 14 | 655 112 14VZ | 655 112 14A4 | M12 | 14 | 13,6 | 22 | 16 | 8 | 34 |
| 655 112 16 | 655 112 16VZ | - | M12 | 16 | 15,6 | 25 | 18 | 9 | 50 |
| 655 112 18 | 655 112 18VZ | - | M12 | 18 | 17,6 | 28 | 20 | 10 | 68 |
| 655 114 16 | 655 114 16VZ | - | M14 | 16 | 15,6 | 25 | 18 | 9 | 50 |
| 655 116 18 | 655 116 18VZ | 655 116 18A4 | M16 | 18 | 17,6 | 28 | 20 | 10 | 68 |
| 655 116 20 | 655 116 20VZ | - | M16 | 20 | 19,6 | 32 | 24 | 12 | 117 |
| 655 120 22 | 655 120 22VZ | - | M20 | 22 | 21,6 | 35 | 28 | 14 | 155 |
| 655 124 28 | 655 124 28VZ | - | M24 | 28 | 27,6 | 44 | 36 | 18 | 315 |

Bolts DIN 787 for Tee Slots DIN 650

Material: Tempered steel, forged, slot flats milled, black oxide finish.


Tensile strength:

Up to M12: strength 10.9. Above M12: strength 8.8.

Suitable for Tee slots DIN 650 / ISO 299.

More sizes up to M36 x 600mm on request.

Ordering Details: z.B.: Product No. 655 001 00, Bolt DIN 787, M6 x 25 mm

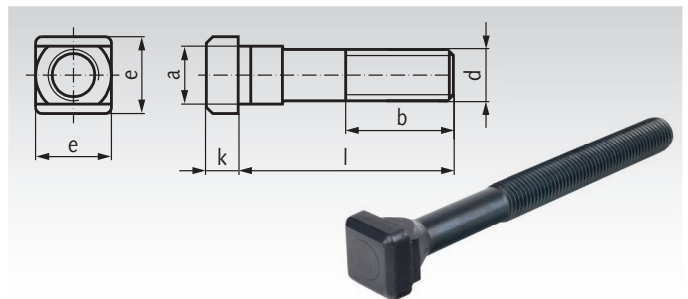

| Product No. | d mm | for Tee Slot mm | l mm | a mm | b mm | e mm | k mm | Weight g |
|-------------|---------|--------------------|---------|---------|---------|---------|---------|-------------|
| 655 001 00 | M6 | 6 | 25 | 5,6 | 15 | 10 | 4 | 10 |
| 655 002 00 | M6 | 6 | 40 | 5,6 | 28 | 10 | 4 | 15 |
| 655 004 00 | M8 | 8 | 50 | 7,6 | 35 | 13 | 6 | 26 |
| 655 005 00 | M8 | 8 | 80 | 7,6 | 50 | 13 | 6 | 37 |
| 655 006 00 | M10 | 10 | 40 | 9,6 | 30 | 15 | 6 | 33 |
| 655 007 00 | M10 | 10 | 63 | 9,6 | 45 | 15 | 6 | 50 |
| 655 009 00 | M10 | 10 | 100 | 9,6 | 60 | 15 | 6 | 67 |
| 655 011 00 | M12 | 12 | 50 | 11,6 | 35 | 18 | 7 | 58 |
| 655 012 00 | M12 | 12 | 80 | 11,6 | 55 | 18 | 7 | 87 |
| 655 014 00 | M12 | 12 | 125 | 11,6 | 75 | 18 | 7 | 120 |
| 655 015 00 | M12 | 14 | 50 | 13,6 | 35 | 22 | 8 | 76 |
| 655 016 00 | M12 | 14 | 80 | 13,6 | 55 | 22 | 8 | 100 |
| 655 018 00 | M12 | 14 | 125 | 13,6 | 75 | 22 | 8 | 135 |
| 655 019 00 | M16 | 16 | 63* | 15,6 | 45 | 25 | 9 | 136 |
| 655 020 00 | M16 | 16 | 100* | 15,6 | 65 | 25 | 9 | 200 |
| 655 022 00 | M16 | 16 | 160* | 15,6 | 100 | 25 | 9 | 290 |
| 655 023 00 | M16 | 18 | 63 | 17,6 | 45 | 28 | 10 | 162 |
| 655 024 00 | M16 | 18 | 100 | 17,6 | 65 | 28 | 10 | 220 |
| 655 026 00 | M16 | 18 | 160 | 17,6 | 100 | 28 | 10 | 300 |
| 655 028 00 | M20 | 20 | 160* | 19,6 | 100 | 32 | 12 | 444 |
| 655 029 00 | M20 | 22 | 80 | 21,6 | 55 | 35 | 14 | 332 |
| 655 030 00 | M20 | 22 | 125 | 21,6 | 85 | 35 | 14 | 390 |
| 655 032 00 | M20 | 22 | 160* | 21,6 | 100 | 35 | 14 | 497 |

* These dimensions are not part of the DIN.

Threaded bars page 556. Nuts with collar page 558. Washers page 559.