


Slotted Round Nuts DIN 1804

Material: type w = steel, black oxide finish, unhardened, unground.
 type h = steel, hardened with the exception of the thread, faces ground.
 type rf = stainless steel 1.4301 (AISI 304), unhardened, unground.

At these nuts, the stepped face with $\varnothing d_3$ shall always be used as the bearing face.

From size M45x1.5, the nuts have 6 slots.

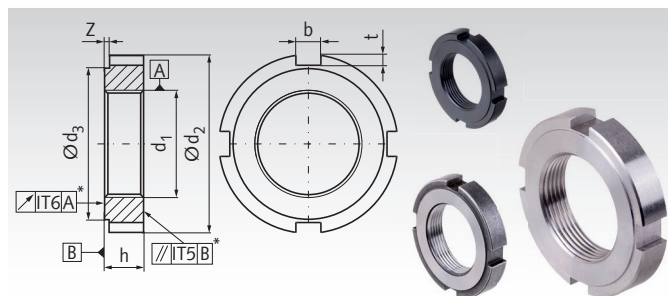

Ordering Details: e.g. Product no. 652 608 00, Slotted Nut DIN 1804 type w, M8x1

Product No. type w	Product No. type h	Product No. type rf	Thread d ₁ mm	d ₂ mm	d ₃ mm	h ^{h14} mm	b mm	t mm	z mm	Number of slots	Weight g
652 608 00	652 808 00	-	M8 x 1	20	16	5	4	1,5	0,5	4	10
652 610 00	652 810 00	652 996 10	M10 x 1	25	20	6	5	2	0,5	4	18
652 612 00	652 812 00	652 996 12	M12 x 1,5	28	23	6	5	2	0,5	4	22
652 614 00	652 814 00	-	M14 x 1,5	30	25	7	5	2	0,5	4	29
652 616 00	652 816 00	652 996 16	M16 x 1,5	32	27	7	5	2	0,5	4	32
652 618 00	652 818 00	-	M18 x 1,5	34	28	8	6	2,5	0,5	4	38
652 620 00	652 820 00	652 996 20	M20 x 1,5	36	30	8	6	2,5	0,5	4	42
652 622 00	652 822 00	-	M22 x 1,5	40	34	9	6	2,5	0,5	4	59
652 624 00	652 824 00	652 996 24	M24 x 1,5	42	36	9	6	2,5	0,5	4	63
652 626 00	652 826 00	-	M26 x 1,5	45	38	10	7	3	0,5	4	78
652 628 00	652 828 00	652 996 28	M28 x 1,5	50	43	10	7	3	0,5	4	101
652 630 00	652 830 00	652 996 30	M30 x 1,5	50	43	10	7	3	0,5	4	94
652 632 00	652 832 00	652 996 32	M32 x 1,5	52	45	11	7	3	0,5	4	108
652 635 00	652 835 00	652 996 35	M35 x 1,5	55	48	11	7	3	0,5	4	117
652 638 00	652 838 00	652 996 38	M38 x 1,5	58	50	11	8	3,5	0,5	4	123
652 640 00	652 840 00	652 996 40	M40 x 1,5	62	54	12	8	3,5	0,5	4	159
652 642 00	652 842 00	-	M42 x 1,5	62	54	12	8	3,5	0,5	4	147
652 645 00	652 845 00	652 996 45	M45 x 1,5	68	60	12	8	3,5	0,5	6	181
652 648 00	652 848 00	652 996 48	M48 x 1,5	75	67	13	8	3,5	0,5	6	253
652 650 00	652 850 00	652 996 50	M50 x 1,5	75	67	13	8	3,5	0,5	6	238
652 652 00	652 852 00	-	M52 x 1,5	80	70	13	10	4	0,5	6	275
652 655 00	652 855 00	652 996 55	M55 x 1,5	80	70	13	10	4	0,5	6	251
652 658 00	652 858 00	-	M58 x 1,5	90	80	13	10	4	0,5	6	360
652 660 00	652 860 00	652 996 60	M60 x 1,5	90	80	13	10	4	0,5	6	341
652 662 00	652 862 00	-	M62 x 1,5	95	85	14	10	4	0,5	6	426
652 665 00	652 865 00	652 996 65	M65 x 1,5	95	85	14	10	4	0,5	6	394
652 668 00	652 868 00	-	M68 x 1,5	100	90	14	10	4	0,5	6	444
652 670 00	652 870 00	652 996 70	M70 x 1,5	100	90	14	10	4	0,5	6	418
652 672 00	652 872 00	-	M72 x 1,5	110	100	14	10	4	0,5	6	577
652 675 00	652 875 00	-	M75 x 1,5	110	100	14	10	4	0,5	6	540
652 680 00	652 880 00	-	M80 x 2	115	105	16	10	4	1	6	576
652 685 00	652 885 00	-	M85 x 2	120	110	16	10	4	1	6	680
652 690 00	652 890 00	-	M90 x 2	130	120	16	10	4	1	6	843
652 695 00	652 895 00	-	M95 x 2	135	120	16	12	5	1	6	860
652 699 00	652 899 00	-	M100 x 2	145	130	16	12	5	1	6	1040

* Face position tolerances only for type h.